


Product Highlights

- Operating temperature from -70°C to +125°C (-94°F to +257°F)
- UL recognized component
- Wrappable design
- Secure closure
- Easy to apply and remove
- Ideal for reworking components without disconnecting them
- Highly flexible
- Does not trap heat or humidity
- Also available laminated with reflective foil*

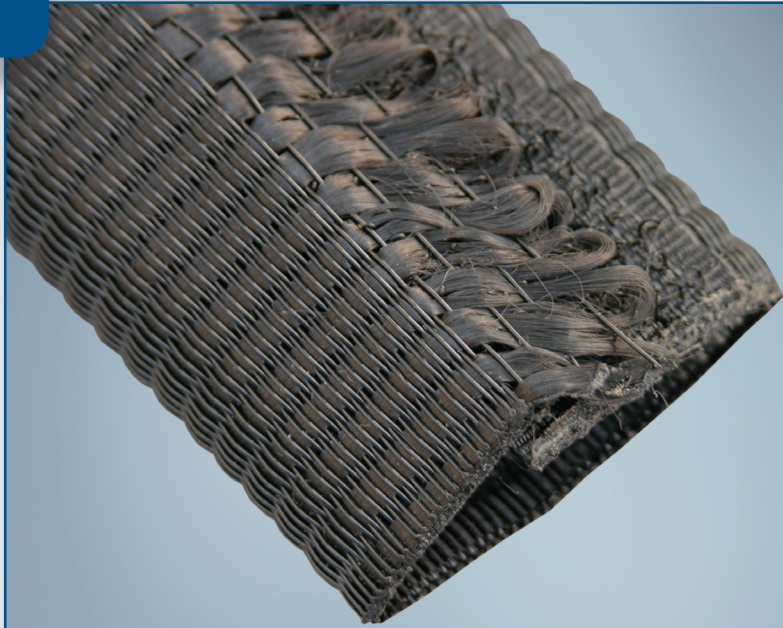

HookIt™ is a lightweight, damage-resistant sleeving used to protect and dress wiring and hose assemblies. Its patented hook and integral loop closing feature eliminates the need for an open end for installation. HookIt oversleeve permits quick and easy access for inspection, rework or replacement of components.

The 100% polyester product is comprised of PET monofilament warp strands and PET multifilament weft strands which form the integral loop. The hook portion of the product is secured to the sleeving with a polyester thread.

HookIt oversleeve can easily be applied to even very long lengths of cable or hose runs. It can be applied without an open end, and easily removed and re-applied. HookIt is ideally suited for cost-effective long length detached harness oversleeving, especially on larger sizes. In addition, post-assembly or retrofit applications can be made without removing end hardware and without circuit disturbance or service interruption. It may also be used when experience indicates a need to acid protective sleeving or cosmetic covering on specific segments of wiring already installed.

HookIt has many applications in the marine, rail, automotive, electronic and general manufacturing industries.

** Please consult factory for more information about HookIt AL.*



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – HookIt™

Property	Test Method	Result
Operating Temperature		-70°C to +125°C (-94°F to +257°F)
Melt Temperature	ASTM D-3418	+250°C
Low Temperature Flexibility	MIL-DTL-23053E	-70°C
Smoke Density	ASTM E-1354	Dmc = 1.44
Copper Corrosivity	MIL-I-23053	No Effect

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Product Specifications

Commercial Part Number	Recommended Application Range (mm)	Weight g/m (lbs/ft)	Standard Packaging m (ft)
Hookit 13-0	Up to 13	24.97 (0.0167)	50 (164')
Hookit 19-0	Up to 19	32.15 (0.0215)	50 (164')
Hookit 25-0	Up to 25	28.04 (0.0255)	50 (164')
Hookit 32-0	Up to 32	44.71 (0.0299)	50 (164')
Hookit 38-0	Up to 38	51.62 (0.0346)	50 (164')
Hookit 45-0	Up to 45	59.23 (0.0397)	50 (164')
Hookit 51-0	Up to 51	72.51 (0.0486)	50 (164')


Availability

Bentley-Harris® Hookit™ is available in sizes 13 to 51mm. Standard color is black.

Hookit is supplied on cardboard spools or cut to length according to your specifications.

Part Numbering System

Example	Product Name	Size	Color	Quantity
	Hookit	19	0 (Black)	50m

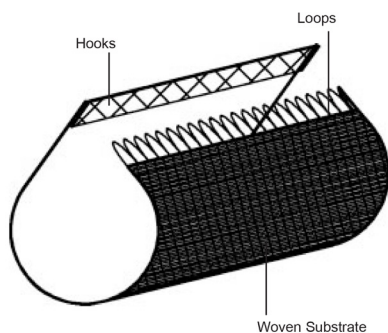

United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600

EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560

Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565

www.systemsprotection.com

BentleyHarris®
Protection Products

For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

HOOKIT-GL(EN-A4)A