


## Product Highlights


- Operating temperature from -60°C to +200°C (-76°F to +392°F)
- High performance EMI shielding
- ASD EN 6049-008
- Excellent cut-through and abrasion resistance
- Halogen-free
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Tracer indicating the maximum operating diameter
- Water repellent
- Salt Spray Resistant (500 hours)



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)



Without PTFE Layer



With PTFE Layer

**ROUNDIT® 2000 NX EMI** is a self-wrapping sleeve designed for mechanical protection and EMI shielding of wire and cable bundles. The outer layer, which supplies the abrasion resistance, is manufactured from PPS monofilaments and Nomex® with a water repellent treatment. The inner layer is composed of nickel-plated copper (Cu/Ni), which provides EMI insulation. The outer layer construction with a 100% covering ratio provides excellent cut-through and abrasion resistance.

ROUNDIT 2000 NX EMI is also available with an internal layer of PTFE tape; allowing wire harnesses to be protected from the inner metal layer.

The self-wrapping feature allows for quick and easy installation and removal of the product for assembly and maintenance.


ROUNDIT 2000 NX EMI has many applications in the aeronautical and military industries.

*Nomex is a registered trademark of E.I. DuPont de Nemours.*



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

# Performance Data – ROUNDIT® 2000NX EMI

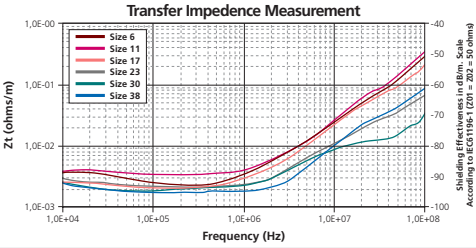Property	Test Method	Result
PHYSICAL		
Operating temperature range	Thermal endurance & shocks	-60°C to +200°C (-76°F to +392°F)
Rapid change of temperature	EN2591-305	Pass
Flammability/smoke density/toxicity	ABD 031 & FAR 25 § 853	Conforms
Water repellent	EN 6059 Part 305	Pass
MECHANICAL		
Abrasion resistance	EN 6059 Part 403	Pass
Dynamic cut-through	EN 6059 Part 405	Pass
CHEMICAL		
Fluid Resistance Jet Fuel JP-4 (Otan F44) Hydraulic Fluid (Skydrol 500 B4) Mineral Oil (MIL-L-7870A) Synthetic Oil (MIL-L-23699) Cleaning Fluids (MIL-L-87936) De-icing Fluid (MIL-A-8243)	EN 6059-303	Good resistance Good resistance Good resistance Good resistance Good resistance Good resistance
Salt spray resistance	EN 2591-307 — 500 hours ASTM B355	Pass Class 27 nickel plated copper
Mould Growth	prEN 6059 Part 306	Pass
EMI PERFORMANCE		
Transfer impedance EC 60512-23-3 (triaxial method)  Tests made by the Labinal Laboratory in France. Report N° D10-04-061 made on 5/27/2004		
Size 11 Ro = 3.45 mΩ/m		

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Product Specifications

Commercial Part Number	Recommended Application Range mm (in)		Max Weight g/m (lbs/ft)	Max Weight (with PTFE layer) g/m (lbs/ft)	Standard Packaging m (ft) Continuous Length	Max Backshell Diameter mm (in)
	Min Ø	Max Ø				
R2000 NX EMI V* 6-5	1 (1/32")	6 (1/4")	79 (0.053)	86 (0.058)	50 (164')	10 (0.375)
R2000 NX EMI V* 11-5	6 (1/4")	11 (7/16")	92 (0.062)	102 (0.068)	50 (164')	14.8 (0.583)
R2000 NX EMI V* 14-5	11 (7/16")	14 (9/16")	116 (0.078)	132 (0.088)	25 (82')	20 (0.787)
R2000 NX EMI V* 17-5	14 (9/16")	17 (11/16")	149 (0.100)	165 (0.111)	25 (82')	23 (0.906)
R2000 NX EMI V* 23-5	17 (11/16")	23 (7/8")	175 (0.117)	196 (0.132)	25 (82')	30.4 (1.197)
R2000 NX EMI V* 30-5	23 (7/8")	30 (1-3/16")	235 (0.157)	262 (0.176)	25 (82')	39.3 (1.547)
R2000 NX EMI V* 38-5	30 (1-3/16")	38 (1-1/2")	305 (0.204)	339 (0.228)	25 (82')	49 (1.929)

V\* = A : Without internal PTFE layer; V\* = B : With internal PTFE layer.

## Part Numbering System

Example	Product Name	Version	Size	Color	Quantity
	ROUNDIT 2000 NX EMI	B	6	5 (green)	50m / 164ft



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)

