


Product Highlights

- Operating temperature from -60°C to +260°C (-76°F to +500°F)
- ASD EN 6049-009
- Fire protection of wire harnesses acc. to ISO 2685: 5 min at +1100°C (+2012°F)
- Excellent cut-through and abrasion resistance
- Halogen-free
- Self-wrapping design
- Ideal for reworking components without disconnecting them
- Water repellent

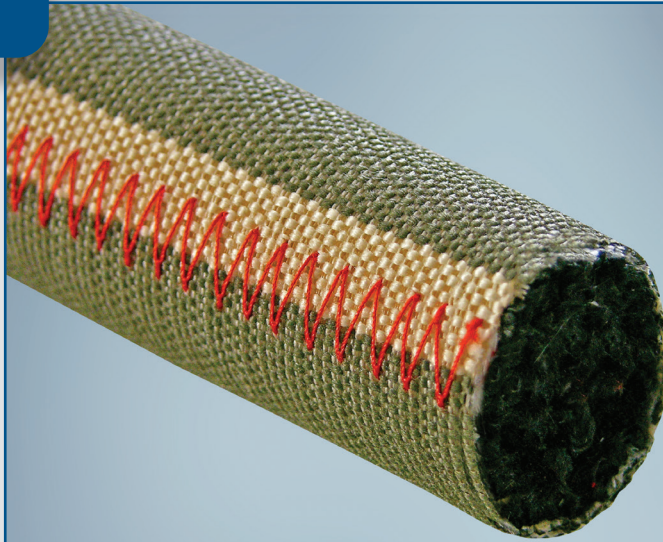

ROUNDIT[®] Therm-A is a multi-layer thickwall wrappable sleeving with a water repellent treatment designed for thermal protection and maintenance of wire and cable bundles. Its 100% covering ratio provides excellent cut-through and abrasion resistance.

The construction of ROUNDIT Therm-A ensures an excellent fire protection for wire harnesses up to +1100°C (+2000°F) for 5 minutes according to ISO 2685 specification.

The self-wrapping design of ROUNDIT Therm-A allows for quick and easy installation and removal of the product for assembly and maintenance. This design also accommodates break-out areas and provides ease of removal when inspection or maintenance of cables is necessary. To secure break-out areas RT TAPE is available.

As an additional benefit, ROUNDIT Therm-A is available in a range of sizes to accommodate a variety of cables and wire diameters.

Closure of the product is secured with a fire resistant lacing tape NT-40 withstanding 5 min at +1100°C (+2000°F) in compliance with ISO 2685.

ROUNDIT Therm-A is mainly used in the aircraft industry.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – ROUNDIT® Therm-A

Property	Test Method	Result
PHYSICAL		
Operating temperature range	EN 6059-302	-60°C to +260°C
Fire resistance	ISO 2685 — 5 min Wire harness diameter 10 with ARINC pairs, monofilaments, twisted pairs and twisted shielded pairs down to #24* 24h preliminary fluid immersion in: Jet fuel (F34 JP8) Hydraulic fluid (Skydrol Hyjet IV) Lubricating oil (0-156) *Speced list available upon request.	After 5 min flame exposure at +1100°C, no loss of resistance of insulation below 10 kΩ
Flammability/smoke density/toxicity	ABD 031 & FAR 25 § 853	Conforms
Water repellent	EN 6059-305	Pass
MECHANICAL		
Abrasion resistance	EN 6059-403	Pass
Dynamic cut-through	EN 6059-405	Pass
Vibrations	EN 6059-406	Pass
CHEMICAL		
Fluid Resistance Jet Fuel JP-5 (Otan F44) Hydraulic Fluid (Skydrol 500 B4) Mineral Oil (MIL-L-7870A) Synthetic Oil (MIL-L-23699) Cleaning Fluids (MIL-L-87936) De-icing Fluid (MIL-A-8243)	EN 6059-303	Good resistance Good resistance Good resistance Good resistance Good resistance Good resistance
Mold Growth	EN 6059-306	Pass

Product Specifications

Commercial Part Number	Nominal Size mm (in)	Size Range mm (in)	Maximum Weight g/m (lbs/ft)	Standard Packaging m (ft)
ROUNDIT Therm-A 10-5	10 (0.39")	5 - 10 (0.20" - 0.39")	336 (0.225)	25 (82')
ROUNDIT Therm-A 16-5	16 (0.63")	10 - 16 (0.39" - 0.63")	336 (0.225)	25 (82')
ROUNDIT Therm-A 24-5	24 (0.94")	16 - 24 (0.63" - 0.94")	361 (0.241)	15 (49')
ROUNDIT Therm-A 32-5	32 (1.26")	24 - 32 (0.94" - 1.26")	436 (0.292)	15 (49')

Description	Width mm	Maximum Weight g/m	Standard Packaging m
RT TAPE	145 ± 10	338	25

Part Numbering System

Example	Product Name	Size	Color	Quantity
	ROUNDIT Therm-A	10	5 (green)	25 m

United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

RITHERMA-EMEA(EN-A4)A