

Product Highlights


- High Level Flame Protection during exposure to +1000C for 10 minutes
- Dielectric protection >4.5kV DC Post Flame Exposure of +1000°C for 10 minutes
- Self-amalgamating
- Compatible with FyreJacket® product line
- Easy to Install
- Zero halogen
- Shelf Life: two years after date of manufacture

Product Highlights

- Accessory to FyreJacket® to seal ends of sleeve installed on
 - Flexible Busbars
 - Rigid Busbars
 - High voltage cables
- Connect multiple pieces of FyreJacket®



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

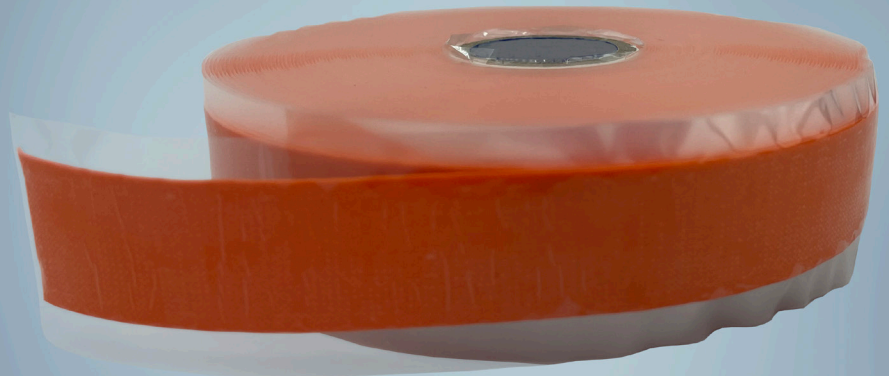

Systems Protection offers Silicone Tape 64R, an orange (RAL 2003 reference) tape with a fiberglass base coated with a self-amalgamating silicone elastomer.

After several hours at ambient temperature, the surface of this tape sticks together when light pressure is added.

This tape is used for sealing, connecting and finishing the cut ends of sleeves in critical applications within battery packs.

Silicone Tape 64R is compatible with FyreJacket® products to provide thermal runaway protection to critical Electrical Systems within battery pack.



Silicone Tape 64R combined with FyreJacket® 1650 on a busbar.

Performance Data – Silicone Tape 64R

Property	Test Method	Result
Thermal Runaway	SP Internal Test Method	Resists 10min x 1000°C flame
Elongation at break		15%
Flammability	UL 94	V0 Rating
Dielectric Strength POST Thermal Runaway	SP Internal Test Method	> 4.5kV DC
Fluids Resistance	SAE J2192	Pass
Working Temperature		-60°C to +260°C (-76°F to +500°F)

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Product Specifications

Commercial Part Number	Thickness mm (in)	Width mm (in)	Color	Includes Glass Tape Substrate	Standard Packaging m (ft)	Rolls per Box
Silicone Tape 64R	0.5 (0.020")	19 (0.75")	Orange	Yes	15 (50')	15

Recommendation Time for Amalgamate

Temperature (°C)	250	200	150	127	120
Time in Minutes	15	20	35	80	120

Availability

Product may be available in customized geometries other than depicted above.

Please contact your sales representative for availability.

Storage

Tapes should be stored in original boxes, in a cool, dark location, not in close proximity to steam pipes, radiators or other sources of heat, at a temperature no greater than 37°C (98°F).



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

SILTAPE64R-GL(EN-A4)B