


## Product Highlights


- Operating temperature from -60°C to +260°C (-76°F to +500°F)
- Good fluid resistance
- Easy to install
- Aesthetic solution
- Self-amalgamating
- Local protection
- Zero halogen
- ABS 5334 (66N + 67N)
- ASNA5107 (58N-59N-68N-69N-78N-79N-88N-89N-98N-99N)
- Shelf life: One year after date of manufacture
- Also available perforated to customized lengths for reduced installation time and improved inventory control (66N and 67N only)



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

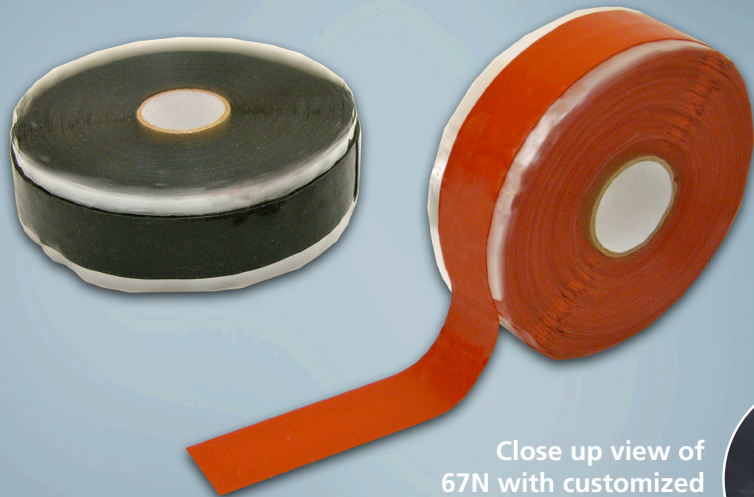

Close up view of 67N with customized perforations



Tenneco Systems Protection offers a range of silicone elastomer tapes, which self-amalgamate at ambient temperature.

The elongation of tape 66N and 67N ranges from 300 to 500%.

Composed of an additional fiberglass base coated with a self-amalgamating silicone elastomer, the tapes 58N-59N-68N-69N-78N-79N-88N-89N-98N-99N provide high temperature mechanical protection.

After several hours at ambient temperature, the surface of these tapes sticks together when light pressure is added.

These tapes are used for sealing, connecting and finishing the cut ends of sleeves exposed to high temperature. These products can also be used to provide local protection to connection accessories and other wire harness components.

66N and 67N are offered in customized perforated lengths to help reduce installation time. With this feature, cutting tools such as scissors or blades are no longer necessary. This allows these tapes to be torn by hand directly off the roll for quick and easy installation onto your application, and is available in 3/4" (19 mm) and 1" (25 mm) widths with a minimum length of 2.5" (64mm)

Property	Test Method	58N   59N   66N   67N   68N   69N   78N   79N   88N   89N   98N   99N											
		<b>Working temperature</b>	-60°C to +260°C (-76°F to +500°F)										
<b>Elongation at break</b>		15%	15%	500%	300%	15%	15%	15%	15%	15%	15%	15%	15%
<b>Fluid Resistance</b> Jet Fuel (JP5) Hydraulic Fluid (Skydrol 500B4) Mineral Oil (NATO 0142) Synthetic Oil (NATO 0156) Cleaning Fluids – MIL C 87836 – 25% Propanol + 75% white spirit – Foran 141 B Cooling Fluid (MIL-A-8243)	Immersion in the fluids for a few seconds of the silicone tape amalgamated on its support (harness)												
<b>Dielectric strength</b>	EN6059-501 – Breakdown voltage method applied	<b>On tape 67N stretched at 50%:</b> 10 kV from 25 to 50% overlap 15 kV from 75 to 100% overlap											

### Product Specifications

Commercial Part Number	Thickness mm (in)	Width mm (in)	Color	Includes Glass Tape Substrate	Standard Packaging m (ft)	Rolls per Box	NATO Specifications
Silicone Tape 58N	0.5 (0.020")	13 (1/2")	Red/Brown	Yes	15 (50')	15	–
Silicone Tape 59N	0.5 (0.020")	13 (1/2")	Black	Yes	15 (50')	15	–
Silicone Tape 66N	0.3 (0.012")	19 (3/4")	Red/Brown	No	15 (50')	15	5970-14-467-8824
Silicone Tape 67N	0.5 (0.020")	19 (3/4")	Black	No	15 (50')	15	5970-14-474-7041
Silicone Tape 68N	0.5 (0.020")	19 (3/4")	Red/Brown	Yes	15 (50')	15	5970-14-464-7312
Silicone Tape 69N	0.5 (0.020")	19 (3/4")	Black	Yes	15 (50')	15	–
Silicone Tape 76N	0.5 (0.020")	25 (1")	Red/Brown	No	15 (50')	15	–
Silicone Tape 77N	0.5 (0.020")	25 (1")	Black	No	15 (50')	15	–
Silicone Tape 78N	0.5 (0.020")	25 (1")	Red/Brown	Yes	15 (50')	15	–
Silicone Tape 79N	0.5 (0.020")	25 (1")	Black	Yes	15 (50')	15	–
Silicone Tape 88N	0.5 (0.020")	50 (2")	Red/Brown	Yes	15 (50')	15	–
Silicone Tape 89N	0.5 (0.020")	50 (2")	Black	Yes	15 (50')	15	–
Silicone Tape 98N	0.5 (0.020")	76 (3")	Red/Brown	Yes	15 (50')	15	–
Silicone Tape 99N	0.5 (0.020")	76 (3")	Black	Yes	15 (50')	15	–

### Recommendation Time for Perfect Amalgamate

Temperature (°C)	250	200	150	127	120
<b>Time in Minutes</b>	15	20	35	80	120

### Storage

Tapes should be stored in original boxes, in a cool, dark location, not in close proximity to steam pipes, radiators or other sources of heat, at a temperature no greater than 37°C (98°F).

### Part Numbering System

Example	Product Name	Size	Color	Quantity
	66N	19 x 0.3	Standard	15 rolls

Note: All silicone tapes have a one year shelf life.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.