

Product Highlights

- Operating temperature up to +540°C (+1004°F)
- No discoloration of coating after 400 hour soak at +370°C (+698°F)
- Excellent thermal insulation
- Lightweight
- Automotive fluids resistant
- Excellent flexibility at low temperatures

Typical Applications

- Exhaust Gas Recirculation (EGR) Tubes
- Exhaust System Component Protection

ThermFlex® 1212 is a coated sleeve designed to provide superior insulation protection for Exhaust Gas Recirculation (EGR) tubes. The sleeve easily withstands 400 hour soaks at 370°C with no discoloration of the coating. As an insulator, ThermFlex 1212 is used to provide maximum fuel efficiency and lowered emissions.

Constructed entirely of braided fiberglass, the sleeve allows excellent flexibility in temperatures as low as -70°C. The product is covered with a black high-temperature coating to ensure maximum insulating efficiency and protection to surrounding components. Additionally ThermFlex 1212's coating aides in the handling and installation of the product while also providing an increased level of durability compared to uncoated fiberglass sleeving.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – ThermFlex® 1212

Property	Test Method	Result
Temperature Rating	240 hours at +540°C (+1004°F)	Pass +540°C (+1004°F)
Low Temperature Flexibility	BH100-016A	Pass -70°C (-94°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	BH100-003B	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.


Construction and Typical Product Characteristics

Fiberglass multifilament

Availability

ThermFlex 1212 is available in a range of sizes and cut to your specification. Color is black. Please contact your sales representative for availability.

Thermal Containment of Sleeving Insulation

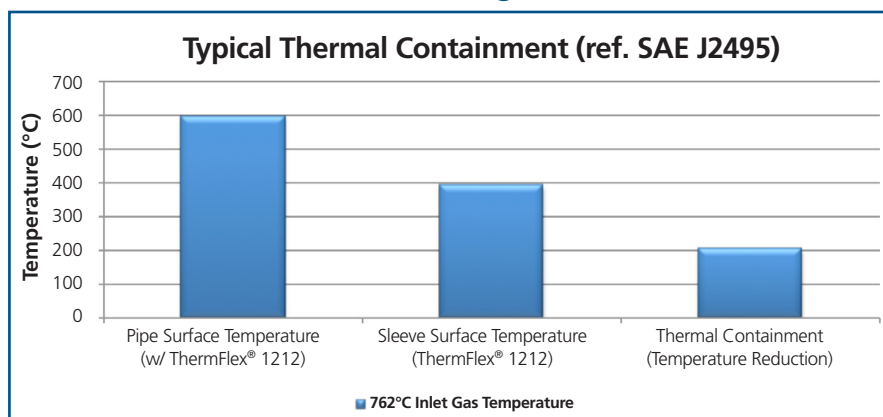

Note: Thermal Containment = Pipe Surface Temperature - Sleeve Surface Temperature.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

TF1212-EMEA(EN-A4)A