


Product Highlights

- Operating temperature up to +150°C (+302°F)
- Superior energy absorption
- Excellent cut-through resistance
- Lightweight, flexible & easy to install
- Available in black or orange

Typical Applications

- High Voltage Cables
- Wire Harnesses
- Fuel Lines
- Other Hose & Tubing Applications

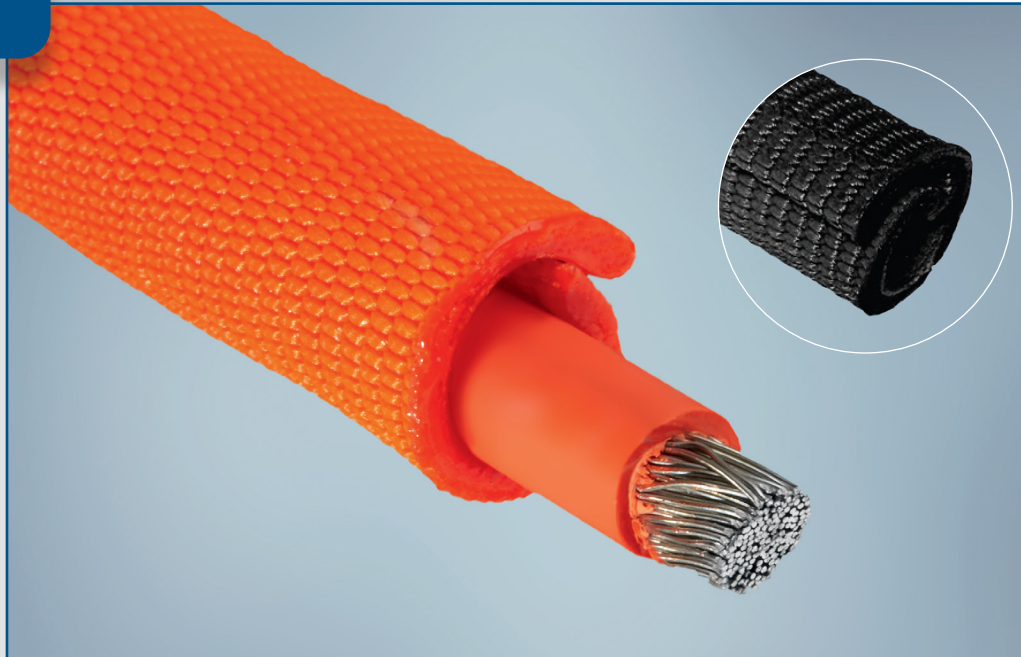

CrushShield® 2442 is a self-wrapping sleeve designed to provide superior cut-through protection for electrical cables. The tough, multilayer construction enables the product to absorb and disperse energy, thus preventing damage to the electrical cable inside. CrushShield 2442's ability to prevent cut through of electrical cables has made it a product of choice for vehicle manufacturers concerned with isolating HEV cables from the vehicles' electricity-conducting chassis in crash situations. CrushShield 2442 helps protect the HEV cable enabling the vehicle to meet stringent industry standards yet its lightweight, flexible structure does not impede cable routing or add unnecessary weight.

CrushShield 2442 is available in orange, for identification of the high voltage cables in hybrid-electric or electric vehicles, as well as black.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – CrushShield® 2442


Property	Test Method	Result
Temperature Rating	240 hours at +175°C (+150°C rating)	Pass +150°C (+302°F)
Flammability	SAE J369	Self-extinguishing
Low Temperature Flexibility	SAE J2192	Pass -70°C (-94°F)
Chipping Resistance	SAE J400	Pass
Dynamic Cut-Through	ASTM D3032-10 Section 22 (modified)	650 N avg.
Fluid Resistance	SAE J2192	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Construction and Typical Product Characteristics

Warp Yarn: Polyester (PET) multifilament

Fill Yarns: Polyester (PET) monofilament and multifilaments



End view of CrushShield 2442 illustrating self-curling wrappable construction with nominal overlap.

Standard Sizes

Nominal Diameter mm	Recommended Application Range mm	
	Min Ø	Max Ø
5	3	5
7	5	7
10	8	10
13	11	13
16	14	16
19	17	19
25	20	25
29	26	29
32	30	34
38	35	38

Colors: Orange | Black

* Max diameter is defined as a nominal 90° sleeve overwrap. A variety of application-based variables will dictate the appropriate sleeve size for use on each harness. Proper sleeve sizing is at the discretion of the end user.

A reduced overlap could be acceptable in certain applications allowing for a larger max diameter harness. Please consult your local sales representative for recommendations and guidance.

Availability

Standard sizes are listed here, Additional sizes could be available upon request.

Available in spools and custom cut lengths. Recommended cut lengths are in 5mm increments. Please see regional drawings for cut length tolerances.

Standard colors are black and orange. Additional colors may be available.

Please consult your local sales representative for regional packaging details and standards.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com

