


Product Highlights

- Operating temperature from -70°C to +125°C (-94°F to +257°F)
- UL 1441 VW-1
- F.A.R. Part 25 (Expando 2623 Plus)
- Does not trap heat or humidity
- Rot-free
- Expandable design accommodates a variety of sizes

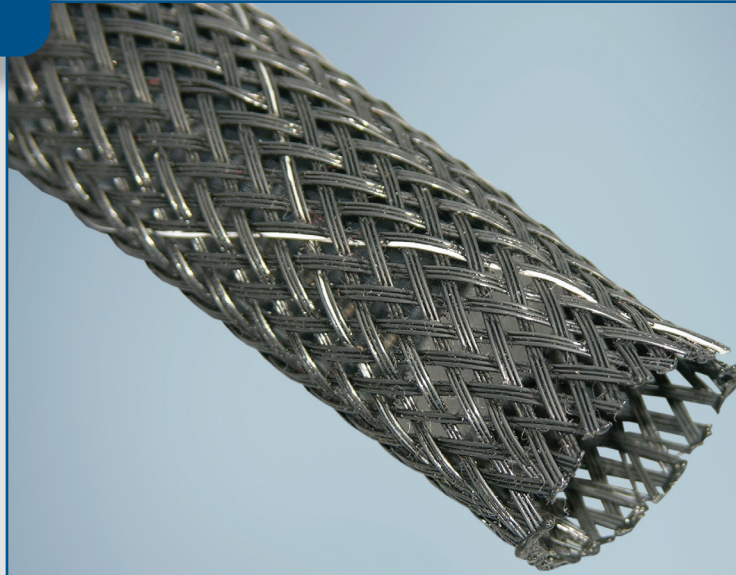

Expando® 2623 & Expando® 2623 Plus Black with a White Tracer are expandable sleeves constructed of flame retardant monofilaments that are designed for applications up to +125°C (+257°F). They both meet the flammability requirements of VW-1 and FAR Part 25.

Expando 2623 Plus balances the properties of mechanical and thermal stability with economy. The patented Bentley-Harris Plus treatment makes end termination neater and easier. The Plus treatment creates a webbing between the filaments of the sleeving to reduce end-fray during installation, allowing Expando 2623 Plus to be cut with ordinary scissors. This reduces assembly time and eliminates the need for proper ventilation equipment required for hot-knife cutting.

Expando 2623 & Expando 2623 Plus Black with a White Tracer protective oversleeves have many applications in the electronics, marine, and general manufacturing industries. The ability of these sleeves to retain flexibility at low temperatures makes them ideal for exposed applications in weather stations, navigation beacons, radar antennas, and airborne and space systems.

Expando products are tough, lightweight oversleeves used to protect cable assemblies, hoses and wire harnesses from chafing, cutting and abrading. The open-braid construction of Expando products enables each size to expand to fit several application shapes and diameters. This open-textile construction also makes them highly flexible and resistant to trapping water, heat and humidity.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – Expando® 2623 & Expando® 2623 Plus

Property	Test Method	Result
Operating Temperature Range		-70°C to +125°C (-94°F to +257°F)
Low Temperature Flexibility	MIL-DTL-23053E	-70°C (-94°F)
Flammability	UL 1441	VW-1
Flammability	F.A.R. Part 25	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Product Specifications

Longitudinal shrinkage should be taken into account when utilizing expansion properties of the sleeve

Commercial Part Number	Recommended Application Range mm (in)		Maximum Weight g/m (lb/ft)	Standard Packaging m (ft)
	Min Ø	Max Ø		
Expando 2623 Plus 3-0/9 Expando 2623 3-0/9	3 (1/8")	7.5 (5/16")	3.55 (0.0024) 3.44 (0.0023)	610 (2,000')
Expando 2623 Plus 6-0/9 Expando 2623 6-0/9	4 (1/6")	13 (1/2")	6.18 (0.0042) 5.89 (0.0040)	305 (1,000')
Expando 2623 Plus 10-0/9 Expando 2623 10-0/9	6 (1/4")	14 (9/16")	11.91 (0.0080) 11.70 (0.0079)	152 (500')
Expando 2623 Plus 13-0/9 Expando 2623 13-0/9	10 (3/8")	25 (1")	12.65 (0.0085) 12.60 (0.0085)	152 (500')
Expando 2623 Plus 19-0/9 Expando 2623 19-0/9	16 (5/8")	37 (1-7/16")	19.64 (0.0132) 19.64 (0.0132)	152 (500')
Expando 2623 Plus 32-0/9 Expando 2623 32-0/9	19 (3/4")	45 (1-3/4")	26.19 (0.0176) 26.19 (0.0176)	76 (250')
Expando 2623 Plus 45-0/9 Expando 2623 45-0/9	23 (15/16")	58 (2-5/16")	44.20 (0.0297) 44.20 (0.0297)	76 (250')
Expando 2623 Plus 51-0/9 Expando 2623 51-0/9	38 (1-1/2")	89 (3-1/2")	54.02 (0.0363) 54.02 (0.0363)	76 (250')
Expando 2623 Plus 64-0/9 Expando 2623 64-0/9	45 (1-3/4")	114 (4-1/2")	67.12 (0.0451) 61.88 (0.0416)	76 (250')

* Expando sleeving products made with the patented "Plus" treatment should not be used in hard vacuum environments nor immersed in solvents or liquids where Plus particulates could contaminate the system environment. Consult Systems Protection for information on protection products for these applications.

Part Numbering System

Example	Product Name	Size	Color	Quantity
	Expando 2623 Plus	3	0/9 (black with white tracer)	610m



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

EXP2623-GL(EN-LTR)A