

## Product Highlights

- Operating temperature  
-54°C to +260°C  
(-65°F to +500°F)
- Low temperature flexibility  
-54°C (-65°F)
- Excellent thermal protection
- Uninflammable
- Retards burn-through
- Flexible
- Open construction, can be installed on preassembled hoses

## Typical Applications

- Heater Hoses
- Power Steering Hoses



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)




**FyreTape®** is a thickwall fiberglass tape coated with silicone rubber that provides thermal protection. FyreTape is used to protect hoses, lines and cables in high temperature areas. It additionally provides protection against short-term hazards such as flame blasts.

When burn-through is a threat, the specially designed construction retards the penetration of the flame. This can allow components to continue to operate for a short amount of time.

The textile construction of FyreTape allows excellent flexibility in temperatures as low as -60°C. The silicone coating is highly resistant to a wide range of solvents and fluids.

To allow a good fit when wrapping FyreTape around its application, use of the self-amalgamating 67N is recommended to further encapsulate the fiberglass and reduce penetration of the fluid inside the assembly.

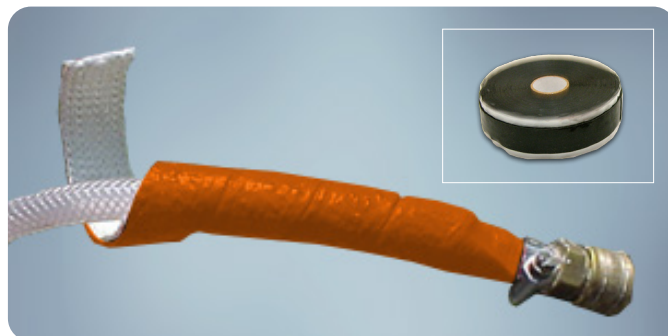

# Performance Data – FyreTape®

Property	Test Method	Result
Temperature Rating		+260°C (+500°F)
Low Temperature Flexibility	ASTM D-746	-60°C (-76°F)
Flame Resistance	FMVSS 302 D45 1333	Non flammable Type A
Fluid Resistance	Norm 9.91220	No visible degradation or alteration after being immersed during 24h in the following fluids: <ul style="list-style-type: none"> <li>– Engine oil, automatic and manual, transmission oils at +100°C</li> <li>– Cooling liquid at +90°C</li> <li>– Brake fluid and windshield cleaner at +50°C</li> </ul>

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Product Specifications

Commercial Part Number	Width mm (in)	Wall Thickness mm (in)	Standard Packaging m (ft)
FyreTape 25-12	25 (1")	3 (1/8")	30 (100')
FyreTape 51-12	51 (2")	3 (1/8")	15 (50')
FyreTape 76-12	76 (3")	3 (1/8")	15 (50')
FyreTape 102-12	102 (4")	3 (1/8")	15 (50')
FyreTape 127-12	127 (5")	3 (1/8")	15 (50')
FyreTape 152-12	152 (6")	3 (1/8")	15 (50')

## Availability

FyreTape is available in a range of widths from 25 to 152 mm. It is available in spools of cut to the following specifications:

- Recommended standard cut length < 500 mm are in 5 mm increments
- Recommended standard cut length > 501 mm are in 10 mm increments

Packaging is in accordance with GALIA standards (ODETTE).

## Part Numbering System

Example	Product Name	Size	Color	Quantity
	FyreTape	25	12 (red iron oxide)	30 m (100 ft)



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)

