

## Product Highlights

- Operating temperature up to +200°C (+392°F)
- Excellent protection against radiant heat
- Open design aides in installation
- Fluid and chemical resistant
- Tubular construction no sew line
- Low Profile

## Typical Applications

- Brake tubes and hoses
- Power steering hoses
- Cable assemblies
- Heater hoses
- Air conditioning hoses
- Wire Harnesses

**ReflectSleeve® 1450E** is a woven, one-piece fiberglass sleeve that is bonded with an aluminized heat-seal film using a polymeric adhesive. A special manufacturing process permits the sleeve to boast a virtually seamless construction.

ReflectSleeve 1450E's smooth outer surface helps to provide improved protection for components that are exposed to radiant heat. Providing superior fluid resistance, ReflectSleeve 1450E is engineered to protect hoses and wire harnesses in passenger vehicles, light and heavy trucks and off-highway vehicles.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

# Performance Data – ReflectSleeve® 1450E

Property	Test Method	Result
Temperature Rating	240 hours at +225°C (+200°C rating)	Pass +200°C (+392°F)
Thermal Endurance	BH100-503	No degradation or delamination (25mm above a +538°C heat source for 6 hours)
Low Temperature Flexibility	BH100-016A	Pass -40°C (-40°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	BH100-003B	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.


## Construction and Typical Product Characteristics

Outer Layer	Aluminum
Inner Layer	Fiberglass multifilament

## Availability

ReflectSleeve 1450E is available in a range of sizes and cut to your specification. Color is aluminum (silver). Please contact your sales representative for availability

## Thermal Effectiveness of Sleeving Insulation

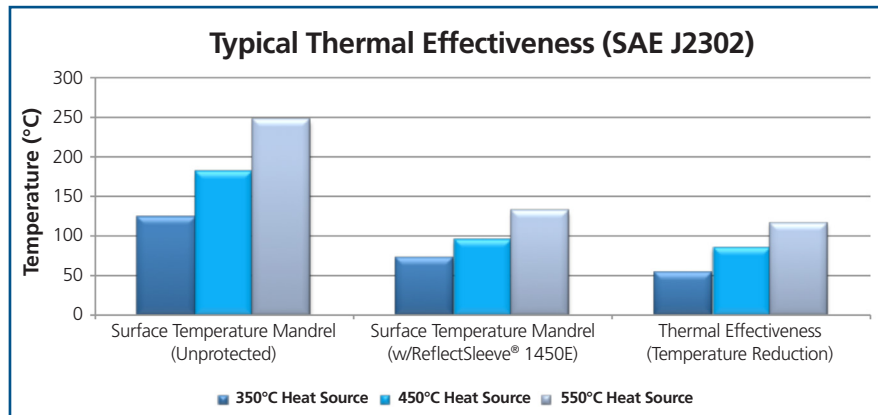

Note: Mandrel is parallel to and 25mm (1") away from heat source



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

RSL1450E-NA(EN-LTR)A