


Product Highlights

- Operating temperature up to +200°C (+392°F)
- Excellent radiant and convective heat protection
- Self-wrapping design allows for break-outs
- Lightweight, flexible & easy to install
- Fluid and chemical resistant

Typical Applications

- Engine compartment applications
- Wire harnesses
- Brake & fuel lines
- Tube, hose & cable assemblies

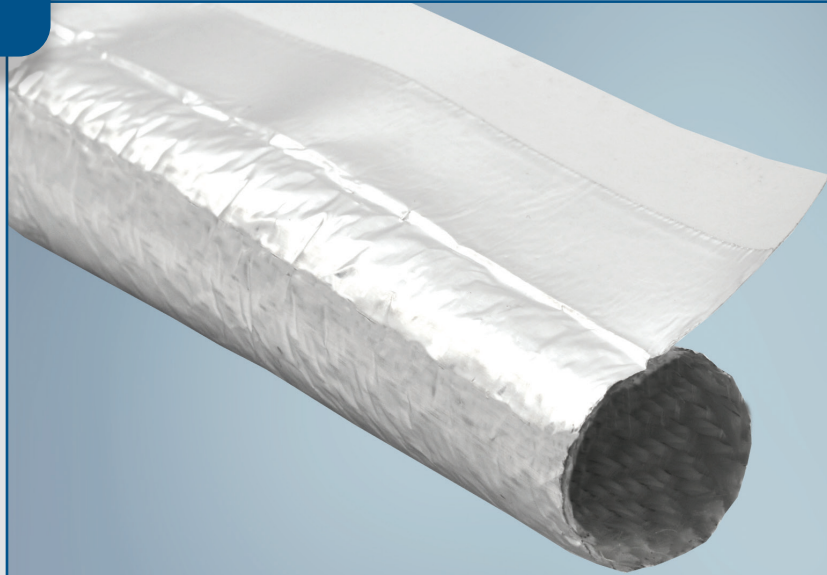

ReflexWrap™ 1463 is a self-wrapping, reflective sleeve designed to provide thermal protection for both radiant and convective heat applications. Composed of a woven fiberglass base fabric and a lamination of aluminum foil, the product can withstand convective heat soaks up to +200°C (+392°F) and simultaneously protect critical components from radiant or reflected heat.

The self-wrapping design of ReflexWrap 1463 allows for quick and easy installation with a self-sealing adhesive reinforcement for permanent closure. The adhesive strip acts as a barrier to dirt and fluids while maintaining the full integrity of the finished aluminized sleeve.

Also available in a closed version (ReflexWrap™ 1463C) for increased installation benefit.




Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – ReflexWrap™ 1463

Property	Test Method	Result
Temperature Rating	240 hours at +225°C (200°C rating)	Pass +200°C (+392°F)
Thermal Endurance	No degradation or delamination (25mm above a 538°C heat source for 6 hours)	Pass
Low Temperature Flexibility	SAEJ2192	Pass -40°C (-40°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	SAEJ2192	Pass
Tensile Strength - Warp	ASTM D5035	Warp: 250 lbf/in. min.

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Thermal Effectiveness of Sleeving Insulation

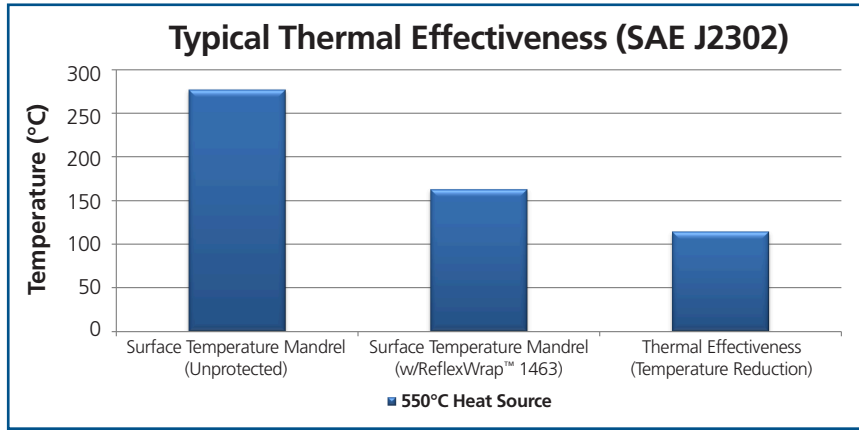

Note: Mandrel is parallel to and 25mm (1") away from heat source

Construction / Characteristics

Outer Layer	Reflective Laminate
Inner Layer	Warp Yarn: Fiberglass multifilament Fill Yarn: Polyester (PET) monofilament

Availability

Standard sizes are listed here. Additional sizes could be available upon request.

Available in custom cut lengths. Recommended cut lengths are in 5mm increments. Please see regional drawings for cut length tolerances.

Please consult your local sales representative for regional packaging details and standards.

Standard Sizes

Commercial Part Number	Nominal Diameter (mm)
ReflexWrap 1463 6	6
ReflexWrap 1463 8	8
ReflexWrap 1463 10	10
ReflexWrap 1463 13	13
ReflexWrap 1463 16	16
ReflexWrap 1463 19	19
ReflexWrap 1463 25	25
ReflexWrap 1463 29	29
ReflexWrap 1463 32	32
ReflexWrap 1463 38	38

* Based on the product's closure and or self-locating design, there could be variables that impact size selection. Please consult your local sales representative for recommendations and guidance to ensure proper functionality and optimized performance for your application.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

RXW1463-NA(EN-LTR)A