


## Product Highlights

- Operating temperature up to +150°C (+302°F)
- High level of abrasion resistance
- Self-wrapping tubular design
- Extremely lightweight
- Used to identify critical components

## Typical Applications

- Instrument panel harnesses
- Engine compartment harnesses
- High voltage cables
- Hybrid vehicles

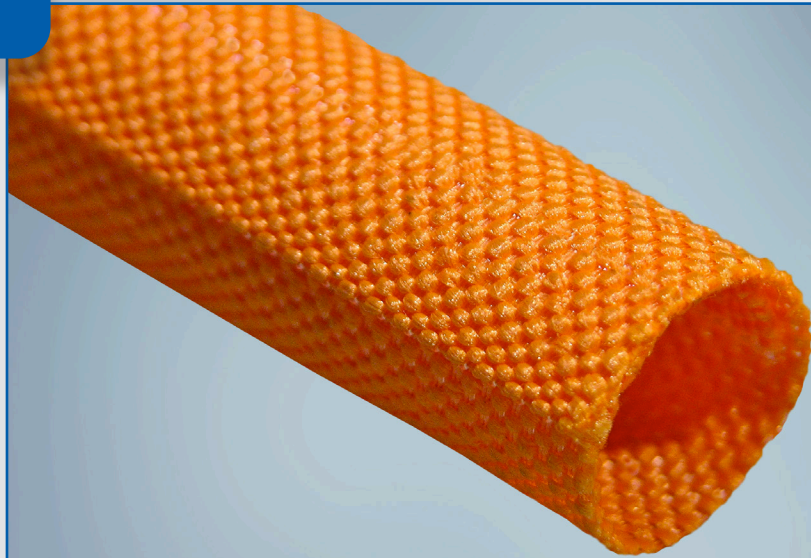

**ROUNDIT® 2000 Orange** is a self-wrapping sleeve designed to provide mechanical protection and acoustical noise suppression. Woven of both monofilament and multifilament polyester yarns the product offers a high level of component protection and is both flexible and lightweight. ROUNDIT 2000 Orange is commonly used to identify high voltage cables in hybrid vehicles.

The polyester construction eliminates problems associated with trapped heat and humidity and also eliminates operator skin irritation during assembly.

ROUNDIT 2000 Orange offers superior abrasion protection and maintains a circular profile when flexed. Its self-wrapping design allows for quick and easy bundling of wire and cable assemblies. The unique design easily allows for breakouts and can be installed over completed assemblies.



Our manufacturing sites are  
certified ISO 9001, IATF 16949,  
or AS/EN 9100, ISO 14001  
and ISO 45001 (Selected Sites)

# Performance Data – ROUNDIT® 2000 Orange

Property	Test Method	Result
Temperature Rating	240 hours at +175°C (+150°C rating)	Pass +150°C (+302°F)
Low Temperature Flexibility	BH100-016A	Pass -50°C (-58°F)
Flammability	FMVSS 302 D45 1333	Pass Self extinguishing Type B
Fluid Resistance	D47 1924	No visible degradation or alteration after being exposed to the following test cycles: <ul style="list-style-type: none"> <li>immersion for 15s at 22°C followed by a drying period of 24 hrs at 150°C: motor oil, protection oil, automatic transmission fluid, mineral hydraulic fluid, zinc chloride (drying at 23°C)</li> <li>immersion for 2hrs at 70°C (in vapor) followed by a drying period of 4hrs at 23°C: battery fluid</li> <li>immersion for 24hrs at 70°C: windscreen washer and at 118°C: engine coolant</li> <li>immersion for 24h at 40°C: standard fuel, unleaded petrol 98, diesel</li> </ul>

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.


## Construction and Typical Product Characteristics

**Warp Yarn:** Polyester (PET) multifilament

**Fill Yarn:** Polyester (PET) monofilament

## Availability

ROUNDIT® 2000 Orange is available in a range of sizes and cut to your specification. Color is orange. Please contact your sales representative for availability



End view of ROUNDIT® 2000 Orange illustrating self-wrapping construction.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.tennecosp.com](http://www.tennecosp.com)



For informational purposes only. Tenneco makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. Tenneco's only obligations are those provided in its terms and conditions of sale for this product, and Tenneco will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2020 Tenneco Systems Protection, manufacturer of Bentley-Harris protection products.

RI2000OR-NA(EN-LTR)A