


Product Highlights

- Operating temperature from -60°C to +175°C (-76°F to +347°F)
- ABS 1552
- C20979
- F.A.R. Part 25
- Excellent cut-through and abrasion resistance
- Self-wrapping design
- Halogen-free
- Ideal for reworking components and breakouts
- Lightweight construction
- Aesthetic solution
- Does not trap heat or humidity

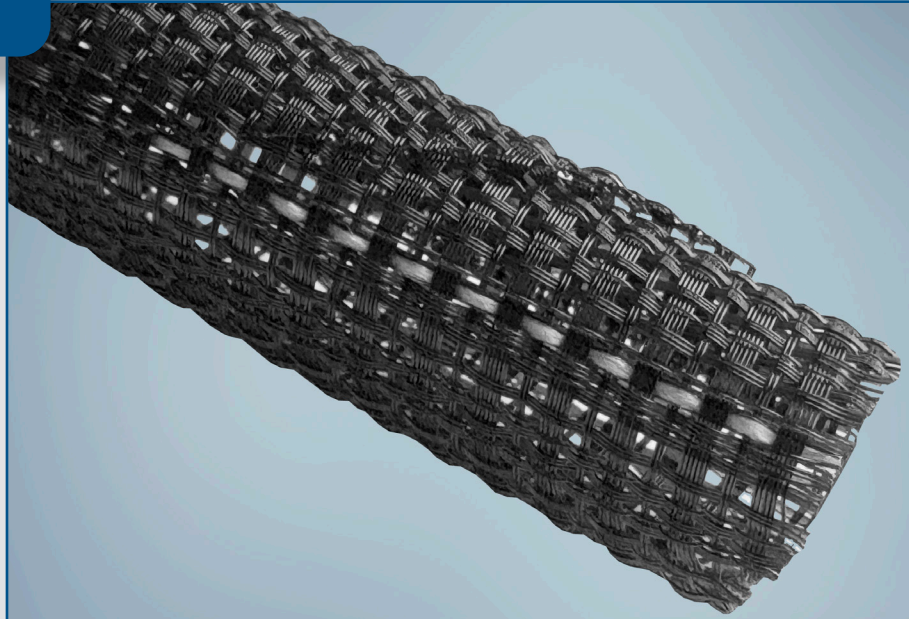

ROUNDIT® PPS is a self-wrapping sleeve manufactured from polyphenylene sulfide (PPS) monofilaments. This product offers excellent off-gassing properties and does not absorb or trap moisture making it ideal for use in space applications. The design allows for quick and easy installation and removal for the assembly, maintenance and inspection of wire harnesses and cable assemblies.

ROUNDIT PPS is available in sizes from 1/4" to 1-1/2" (5 mm to 38 mm) to cover a wide range of cable and wire diameters.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

Performance Data – ROUNDIT® PPS

Property	Test Method	Result
PHYSICAL		
Operating temperature range	EN 6053-302	-60°C to +175°C (-76°F to +347°F)
Low Temperature Flexibility	MIL-DTL-23053E	-70°C
Flammability/smoke density/toxicity	ABD 031 & FAR 25 § 853	Conforms – no halogen content
MECHANICAL		
Abrasion resistance	EN 6059 Part 403	Pass
Dynamic cut-through	EN 6059 Part 405	Pass
Vibrations	DO 160B	No cable abrasion
Hard Vacuum	ASTM E-595	Meets industry limits
TML		1.0% max
CVCM		0.1% max
CHEMICAL		
Fluid Resistance	MIL-DTL-23053E	
Jet Fuel JP-4 (Otan F44)		Good resistance
Hydraulic Fluid (Skydrol 500 B4)		Good resistance
Mineral Oil (MIL-L-7870A)		Good resistance
Synthetic Oil (MIL-L-23699)		Good resistance
Cleaning Fluids (MIL-L-87936)		Good resistance
De-icing Fluid (MIL-A-8243)		Good resistance
5% NaCl Solution		Good resistance
Mold Growth	EN 6059 Part 306	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Product Specifications

Commercial Part Number	Recommended Application Range mm (in)		Max Weight g/m (lbs/ft)	Standard Packaging m (ft)
	Min Ø	Max Ø		
ROUNDIT PPS 5-0/9	1 (1/32")	5 (3/16")	13.0 (0.009)	150 (492)
ROUNDIT PPS 8-0/9	5 (3/16")	8 (5/16")	17.0 (0.011)	100 (328)
ROUNDIT PPS 13-0/9	8 (5/16")	13 (1/2")	25.0 (0.017)	50 (164)
ROUNDIT PPS 19-0/9	13 (1/2")	19 (3/4")	40.0 (0.027)	25 (82)
ROUNDIT PPS 25-0/9	19 (3/4")	25 (1")	49.0 (0.033)	25 (82)
ROUNDIT PPS 32-0/9	25 (1")	32 (1-1/4")	68.0 (0.046)	25 (82)
ROUNDIT PPS 38-0/9	32 (1-1/4")	38 (1-1/2")	85.0 (0.057)	25 (82)

Part Numbering System

Example	Product Name	Size	Color	Quantity
	ROUNDIT PPS	5	0/9 (black with white tracer)	150m



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

RIPPS-GL(EN-LTR)C