


## Product Highlights

- Operating temperature  
-50°C to +200°C  
(-58°F to +392°F)
- Self-wrapping design
- Fast and easy installation for local EMI protection
- Stable construction
- Ideal for reworking components without disconnecting them
- EN45545-2
- NFPA 130
  - ASTM E-162
  - ASTM E-662
- BSS 7239
- SMP 800-C
- Zero Halogen
- UL 94 V0 Raw material
- Cu/Ni metal  
(ASTM B-355)
- Good level of EMI shielding  
R0 max = 6 mΩ and  
Lt = 1.2 nH/m



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

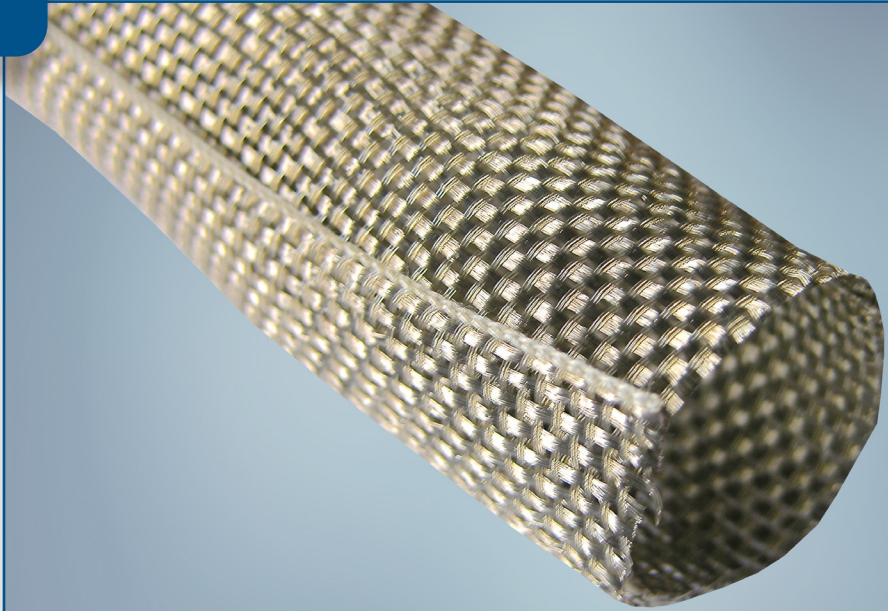

**ROUNDIT® V0 EMI** is a wrap-around sleeving designed for high performance EMI shielding of wire and cable bundles. ROUNDIT V0 EMI is manufactured from UL 94 V0 rated PPS monofilaments and nickel plated copper wires class 4 according to ASTM B-355.

The self-wrapping feature of ROUNDIT V0 EMI allows for quick and easy installation and removal of the product for assembly and maintenance.

The design offers innovative solutions to the protection of breakout areas and also provides ease of removal when inspection or maintenance of cables is necessary.

The stable construction guarantees the same level of EMI shielding regardless of the diameter on which it is installed within the recommended application range.

As an additional benefit, ROUNDIT V0 EMI enables users to stock a limited range of sizes to cover a wide range of cable and wire diameters.

ROUNDIT V0 EMI has many applications in the railway, marine and electronics industries.



As an added benefit, the patented ROUNDIT® Tool will help improve installation time and is designed to install ROUNDIT® products on cable and wire configurations.

# Performance Data – ROUNDIT® V0 EMI

Property	Test Method	Result
<b>PHYSICAL</b>		
Operating Temperature Range		-50°C (-58°F) to +200°C (392°F)
Heat Aging	EN6059-302 (168 hours)	+200°C (392°F)
Fire / Smoke / Toxicity	UL 94 BS6853  DIN 5510 §2 & 54837 EN 45545-2	Raw material classified V0 Zero halogen Toxicity R< 1.0 S4, SR2, ST2 R22 HL3 R23 HL3
Nickel plated copper	ASTM B-355	Nickel plated copper Class 4
<b>CHEMICAL</b>		
Fluid resistance - Hydraulic fluids: NATO.0.156	EN 6059-303 Immersion for 24hrs at +70°C D47 1924	No visible degradation after being exposed
Salt spray resistance	EN2591-307- 96 hours	Pass


## EMI PERFORMANCES

### Resistance Measurement

EN 3475-301  
R0 max all sizes = 6 mΩ

### Transfer Impedance

IEC 62153-4-3 Triaxial method on  
straight installation  
Lt = 1.2 nH

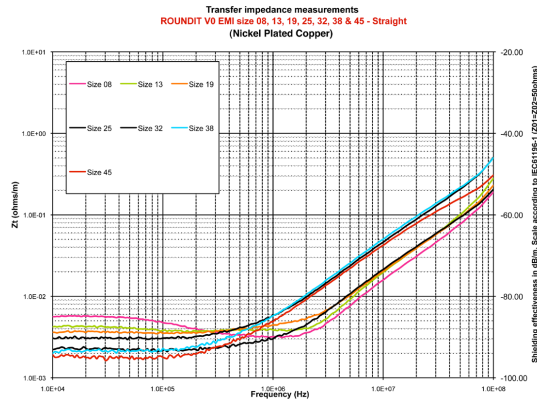

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Product Specifications

Commercial Part Number	Nominal Size* (mm)	Recommended Application Range mm (in)		Sleeve Cross Section (mm <sup>2</sup> )	Maximum Mass g/m	Standard Packaging m (ft)
		Min Ø	Max Ø			
ROUNDIT V0 EMI 8	8	5 (3/16")	8 (5/16")	3.5	40	250 (820')
ROUNDIT V0 EMI 13	13	8 (5/16")	13 (1/2")	4.8	55	175 (574')
ROUNDIT V0 EMI 19	19	13 (1/2")	19 (3/4")	5.9	66	125 (410')
ROUNDIT V0 EMI 25	25	19 (3/4")	25 (1")	6.9	80	75 (246')
ROUNDIT V0 EMI 32	32	25 (1")	32 (1-1/4")	8.9	105	50 (164')
ROUNDIT V0 EMI 38	38	32 (1-1/4")	38 (1-1/2")	10.6	120	35 (114')
ROUNDIT V0 EMI 45**	45	38 (1-1/2")	45 (1-3/4")	11.9	140	35 (114')

\*Nominal size is determined by wrapping the product around a mandrel of a given size to obtain 90 degrees of overlap (average value).

\*\* Size 45 has 80 degrees of overlap (average value).

## Commercial Part Number

Example	Product Name	Size	Color	Quantity
	ROUNDIT V0 EMI	13	8 (Light gray)	175 m



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

RIV0EMI-GL(EN-LTR)B