

Product Highlights


- Operating temperature up to +540°C (+1004°F)
- Excellent thermal insulation
- Flame retardant
- Fluid and chemical resistant
- Lightweight & low profile
- Tubular shape

Typical Applications

- Wire harnesses
- Fuel and hydraulic lines
- Cables and hoses near engines and exhaust systems
- Exhaust Gas Recirculation (EGR) tubes
- Exhaust system component protection



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

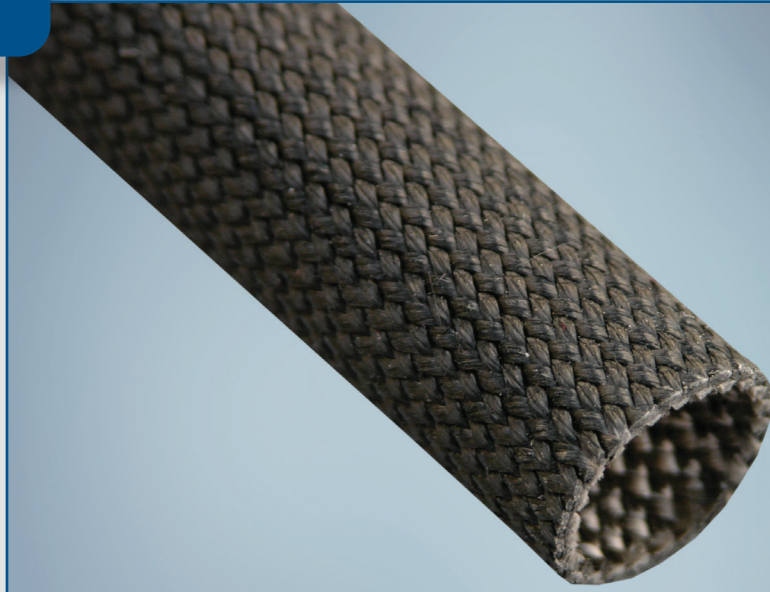

ThermFlex® 1210 is a heat treated and saturated sleeve that provides superior protection against conducted and convective heat. Constructed of braided fiberglass, ThermFlex 1210 is used in high temperature areas to provide superior insulation to components that must maintain elevated temperatures to maximize performance efficiency. ThermFlex 1210's saturated coating aides in the handling and installation of the product while also providing an increased level of durability compared to uncoated fiberglass sleeving.

As an insulator, ThermFlex 1210 is used on Exhaust Gas Recirculation (EGR) tubes, thermactor tubes and exhaust system components to provide maximum fuel efficiency and lowered emissions.


ThermFlex 1210 is also used on wire harnesses, fuel and hydraulic lines, cables and hoses in close proximity to engines and exhaust systems. Its braided construction allows excellent flexibility in temperatures as low as -70°C (-94°F).

Performance Data – ThermFlex® 1210

Property	Test Method	Result
Temperature Rating	240 hours at +540°C (+1004°F)	Pass +515°C (+959°F)
Low Temperature Flexibility	SAE J2192	Pass -70°C (-94°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	SAE J2192	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Thermal Effectiveness of Sleeving Insulation

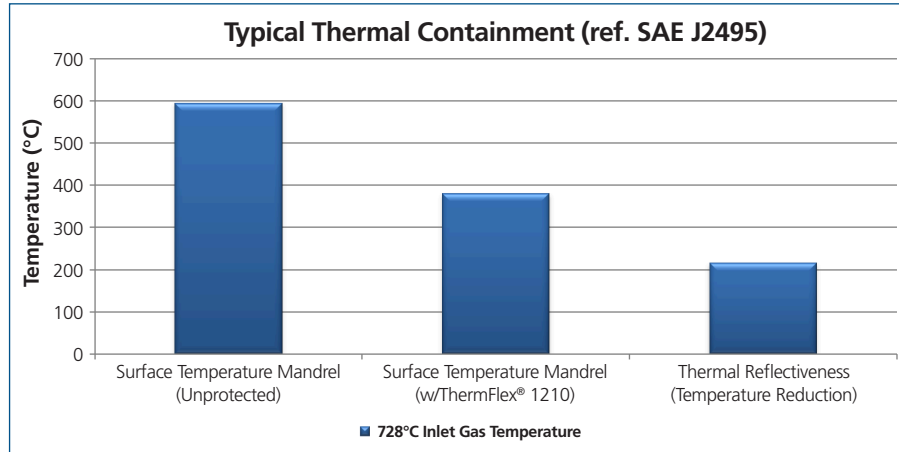

Note: Mandrel is parallel to and 25mm (1") away from heat source

Standard Sizes

Commercial Part Number	Nominal Diameter (mm)
ThermFlex 1210 8	8
ThermFlex 1210 10	10
ThermFlex 1210 11	11
ThermFlex 1210 13	13
ThermFlex 1210 15	15
ThermFlex 1210 16	16
ThermFlex 1210 19	19
ThermFlex 1210 22	22
ThermFlex 1210 25	25
ThermFlex 1210 32	32

* The selection of the tubular or slit version of this product in combination with application based variables, will influence the sleeve size required. Proper sleeve sizing is at the discretion of the end user. Please consult your local sales representative for recommendations and support.

Construction / Characteristics

Outer Layer: High temperature coating

Inner Layer: Fiberglass

Availability

Standard sizes are listed here, Additional sizes could be available upon request. Note smaller sizes are available dependent upon region. Please contact us to learn more.

Available in tubular shape. Customization for optimal installation also available.

Available in spools and custom cut lengths. Recommended cut lengths are in 5mm increments. Please see regional drawings for cut length tolerances.

Standard color is black. Additional colors are available.

Please consult your local sales representative for regional packaging details and standards.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com

