

## Product Highlights


- Operating temperature up to +540°C (+1004°F)
- Excellent thermal insulation
- Flame retardant
- Fluid and chemical resistant
- Lightweight & low profile
- Tubular and slit forms

## Typical Applications

- Wire harnesses
- Fuel and hydraulic lines
- Cables and hoses near engines and exhaust systems
- Exhaust Gas Recirculation (EGR) tubes
- Exhaust system component protection




Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

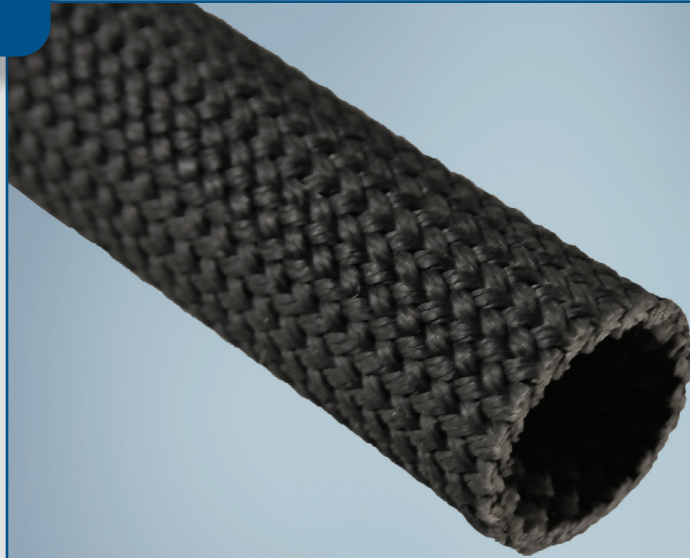

**ThermFlex® 1212** is a heat treated and saturated sleeve that provides superior protection against conducted and convective heat. Constructed of braided fiberglass, ThermFlex 1212 is used in high temperature areas to provide superior insulation to components that must maintain elevated temperatures to maximize performance efficiency. ThermFlex 1212's saturated coating aides in the handling and installation of the product while also providing an increased level of durability compared to uncoated fiberglass sleeving.

As an insulator, ThermFlex 1212 is used on Exhaust Gas Recirculation (EGR) tubes, thermactor tubes and exhaust system components to provide maximum fuel efficiency and lowered emissions.

ThermFlex 1212 is also used on wire harnesses, fuel and hydraulic lines, cables and hoses in close proximity to engines and exhaust systems. Its braided construction allows excellent flexibility in temperatures as low as -70°C (-94°F).

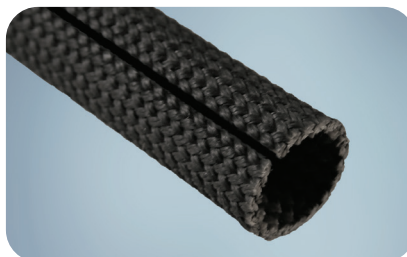

*ThermFlex 1210 is available in a slit version for increased installation benefit.*

# Performance Data – ThermFlex® 1212

Property	Test Method	Result
Temperature Rating	240 hours at +540°C (+1004°F)	Pass +540°C (+1004°F)
Low Temperature Flexibility	BH100-016A	Pass -70°C (-94°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	BH100-003B	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.


## Construction and Typical Product Characteristics

Fiberglass multifilament

## Availability

ThermFlex 1212 is available in a range of sizes and cut to your specification. Color is black. Please contact your sales representative for availability.

## Thermal Containment of Sleeving Insulation

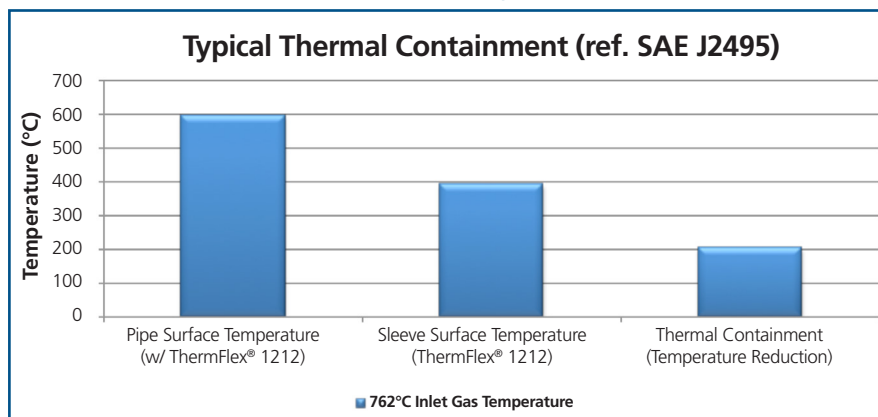

Note: Thermal Containment = Pipe Surface Temperature - Sleeve Surface Temperature.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
 EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
 Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

TF1212-NA(EN-LTR)A