


Product Highlights

- Operating temperature up to +1204°C (+2200°F)
- Protection of short-term heat exposure to +1426°C (+2600°F)
- Extremely flexible
- Attractive appearance
- Expandable

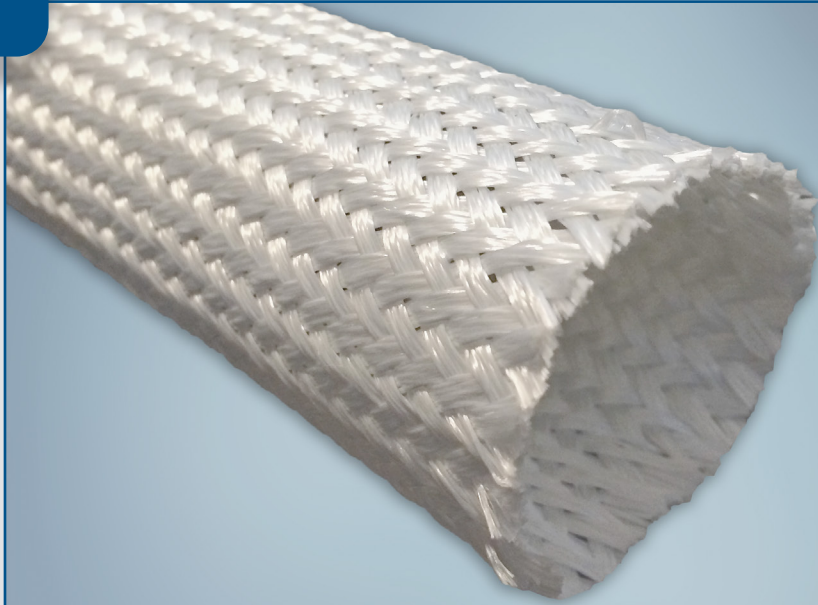

ThermoJacket® C is an uncoated, unsaturated sleeving braided from Nextel* 312 ceramic fibers. ThermoJacket C retains strength and flexibility at continuous temperatures up to 1204°C (+2200°F) and offers significant protection against short term exposures at +1426°C (+2600°F).

Thanks to its unique construction, ThermoJacket C provides excellent long term heat protection for hoses, wire harnesses and cables.

The ThermoJacket product family is available in a variety of grades, offering industrial users the option of selecting a combination of properties best suited to their specific application.

**Nextel is a registered trademark of 3M*




Our manufacturing sites are
certified ISO 9001, IATF 16949,
or AS/EN 9100, ISO 14001
and ISO 45001 (Selected Sites)

Performance Data – ThermoJacket® C

Product Specifications

Commercial Part Number	Size mm (in)	Approximate Number of meters (footage) to cover 30 m (100 ft)	Packaging m (ft)
ThermoJacket C 4-9	6 (1/4")	36 (119')	30 (100')
ThermoJacket C 6-9	9 (3/8")	39 (128')	30 (100')
ThermoJacket C 8-9	13 (1/2")	39 (129')	30 (100')
ThermoJacket C 10-9	16 (5/8")	40 (130')	30 (100')
ThermoJacket C 16-9	25 (1")	38 (126')	30 (100')
ThermoJacket C 20-9	32 (1-1/4")	37 (123')	15 (50')
ThermoJacket C 24-9	38 (1-1/2")	39 (129')	15 (50')
ThermoJacket C 28-9	45 (1-3/4")	38 (125')	15 (50')
ThermoJacket C 32-9	50 (2")	40 (133')	15 (50')
ThermoJacket C 40-9	64 (2-1/2")	41 (135')	15 (50')

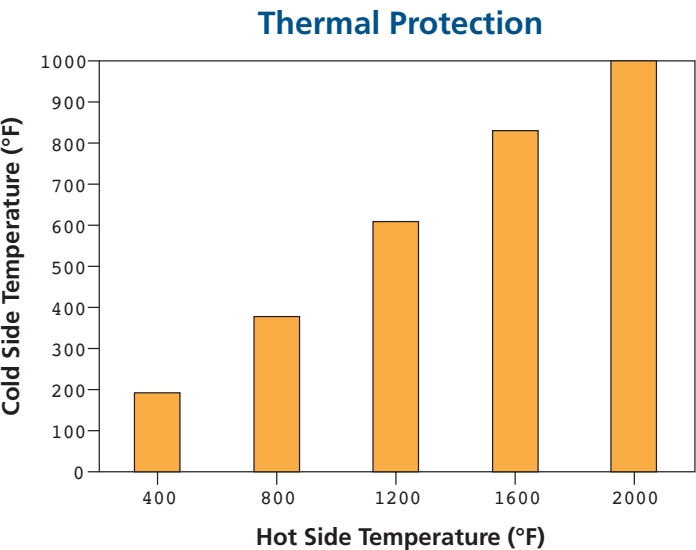

Part Numbering System

Example	Product Name	Size	Color	Quantity
	ThermoJacket C 6	9	9 (natural)	30 m



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.systemsprotection.com



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.