

## Product Highlights


- Operating temperature:  
-40°C up to +250°C  
(-40°F up to +482°F)
- Excellent protection against  
radiant heat
- Custom designs for complex  
components
- Quick and easy installation
- Fluid & chemical resistant

## Typical Applications

- Engine components
- Tubes, Hoses & Cables
- Wire harnesses



Our manufacturing sites are  
certified ISO 9001, IATF 16949,  
or AS/EN 9100, ISO 14001  
and ISO 45001 (Selected Sites)

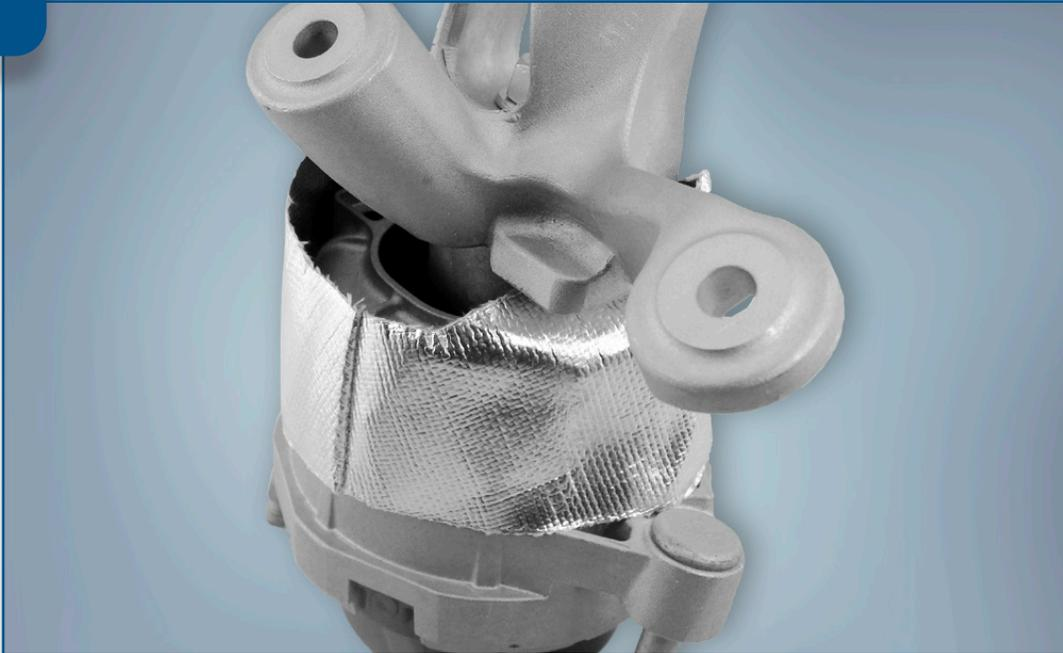

**ReflectShield® 1412** is a woven fiberglass fabric that has an aluminum foil laminated to its outer and inner surfaces. ReflectShield 1412 is designed to provide radiant heat protection for tubes, hoses, wire harnesses and other engine components.

ReflectShield 1412 can be slit to various widths and lengths or custom die cut to complex geometric shapes. ReflectShield 1412 can be customized to include snaps, holes, and other features to reduce complexity and installation time.

# Performance Data – ReflectShield® 1412

Property	Test Method	Result
Temperature Rating	240 hours at +225°C (+200°C rating)	Pass +200°C (+392°F)
Thermal Endurance	BH100-503	No degradation or delamination (25mm above a +538°C heat source for 6 hours)
Low Temperature Flexibility	BH100-016A	Pass -40°C (-40°F)
Flammability	SAE J369	Self-extinguishing
Fluid Resistance	BH100-003B	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

## Construction and Typical Product Characteristics

Outer Layer	Aluminum
Middle Layer	Fiberglass multifilament
Inner Layer	Aluminum

## Availability

ReflectShield 1412 is a customizable product and is available in various designs to meet specific application requirements. Color is aluminum (silver). Please contact your sales representative for availability.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600  
EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560  
Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565  
[www.systemsprotection.com](http://www.systemsprotection.com)



For informational purposes only. SP makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. SP's only obligations are those provided in its terms and conditions of sale for this product, and SP will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2024 Systems Protection - A Tenneco Company, manufacturer of Bentley-Harris protection products.

RSH1412-NA(EN-LTR)A